

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

35.C13538

First Named Inventor or Application Identifier

TAKAHIRO MATSUURA, ET AL.

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

☒ Fee Transmittal Form

(Submit an original, and a duplicate for fee processing)

☒ Specification

Total Pages **38**

☒ 3. Drawing(s) *(35 USC 113)*

Total Sheets **19**

☒ 4. Oath or Declaration

Total Pages **2**

a. ☐

Newly executed (original or copy)

b. ☒

Unexecuted for information purposes

c. ☐

Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]

i. ☐

DELETION OF INVENTOR(S)

Signed Statement attached deleting inventor(s) named in
the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).

☐ Incorporation By Reference *(useable if Box 4c is checked)*

The entire disclosure of the prior application, from which a copy of the oath or
declaration is supplied under Box 4c, is considered as being part of the disclosure of
the accompanying application and is hereby incorporated by reference therein.

6. ☐

Microfiche Computer Program *(Appendix)*

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

a. ☐

Computer Readable Copy

b. ☐

Paper Copy (identical to computer copy)

c. ☐

Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐

Assignment Papers (cover sheet & documents)

9. ☐

37 CFR 3.73(b) Statement
(when there is an assignee)

☐

Power of Attorney

10. ☐

English Translation Document *(if applicable)*

11. ☐

Information Disclosure
Statement (IDS)/PTO-1449

☐

Copies of IDS
Citations

12. ☐

Preliminary Amendment

13. ☒

Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐

Small Entity
Statement(s)

☐

Statement filed in prior application
Status still proper and desired

15. ☐

Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☐

Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐

Continuation

☐

Divisional

☐

Continuation-in-part (CIP)

of prior application No. ____/____

18. CORRESPONDENCE ADDRESS

☒

Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐

Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	13-20 -	0	X \$ 18.00 -	\$ 00.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	4-3 -	1	X \$ 78.00 -	\$ 78.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 -	\$ 00.00
				BASIC FEE (37 CFR 1.16(a))	\$ 760.00
	Total of above Calculations -				\$ 838.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL -				\$ 838.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 838.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.


SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	Richard P. Bauer, Reg. No. 31,588
SIGNATURE	
DATE	May 25, 1999

IMAGE PROCESSING METHOD AND APPARATUS
AND RECORDING MEDIUM

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to an image processing method and apparatus, for correcting an image, and to a recording medium.

Related Background Art

10 Various algorithms have been proposed for use in correcting the highlighting, shadow, contrast and white balance for an image recorded by a digital camera.

However, even when adjustments are made for highlighting, shadow, contrast and white balance, the
15 image quality provided by a digital camera that faithfully reproduces the color of an object is not as satisfactory as is the image quality provided by silver halide photography.

This is true because with silver halide film
20 desired colors are reproduced. That is, so-called memory colors in particular, such as the colors of skin, the sky, and glass, are not always faithfully reproduced, but rather, color tones are shifted and colors are reproduced in accordance with individual
25 preferences. Such color tone shifting is performed for images recorded using silver halide film.

09347844.05559

SUMMARY OF THE INVENTION

It is, therefore, one objective of the present invention to provide a method whereby, to reproduce preferred colors, corrections are made to an image recorded using a specific input device so that the tones and colors of the image more nearly correspond to those that would be produced using silver halide film.

To achieve the above objective, according to a first aspect of the present invention, an image processing method comprises the steps of:

holding a profile for an input device and a profile for an output target film;

preparing a table to approximate a color reproducibility of an output target film as to a color reproducibility of input image data on the basis of the profile for the input device and the profile for the output target film; and

correcting the color of the input image data by using the prepared table.

According to a second aspect of the present invention, an image processing method comprises the steps of:

correcting a color of input image data by using a table prepared on the basis of a color reproducibility for input image data and a color reproducibility for an output target; and

emphasizing an edge of a highlighted portion of

09317844-052509

the image data obtained by color correction.

Objectives and advantages other than those discussed above will become apparent to those skilled in the art during the course of the description of the preferred embodiments of the invention that follows. In the description, reference is made to accompanying drawings, which form a part thereof and which illustrate an example of the invention. Such a description, however, is not an exhaustive recital of the various possible embodiments of the invention, and reference is therefore made to the claims that follow the description for a determination of the scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram illustrating the arrangement of an image correction apparatus according to a first embodiment of the present invention;

Fig. 2 is a flowchart showing the processing according to the first embodiment of the present invention;

Fig. 3 is a diagram showing data held in a input device profile holding unit;

Fig. 4 is a diagram showing data held in an output target film profile holding unit;

Fig. 5 is a flowchart showing the processing performed by a lookup table preparing unit;

Fig. 6 is a diagram showing an example lookup table held in a lookup table holding unit;

Fig. 7 is a flowchart showing the processing performed by an image correcting unit according to the first embodiment of the present invention;

Fig. 8 is a graph showing an example profile for an input device;

Fig. 9 is a graph showing an example profile for an output film;

Fig. 10 is a flowchart showing the processing performed by an output device selecting unit;

Fig. 11 is a flowchart showing the processing performed by an edge emphasis processing unit;

Fig. 12 is a diagram illustrating the arrangement of an image correcting apparatus according to a second embodiment of the present invention;

Fig. 13 is a flowchart showing the processing performed for the second embodiment of the present invention;

Fig. 14 is a flowchart showing the processing performed by a histogram preparing unit;

Fig. 15 is a graph showing an example histogram that has been prepared;

Fig. 16 is a flowchart showing the processing performed by a lookup table preparing unit in Fig. 12;

Figs. 17A and 17B are diagrams showing example lookup tables held in a lookup table holding unit in

663250-442650

Fig. 12;

Fig. 18 is a flowchart showing the processing performed by an image correcting unit according to the second embodiment of the present invention;

5 Fig. 19 is a diagram illustrating the arrangement of an image correcting apparatus according to a third embodiment of the present invention;

Fig. 20 is a flowchart showing the processing performed for the third embodiment of the present invention;

Fig. 21 is a diagram showing image data and an image header stored in an image buffer;

Fig. 22 is a flowchart showing the processing performed by a lookup table preparing unit when an input device is other than a digital camera; and

Fig. 23 is a flowchart showing the processing performed by an output device selecting unit.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 The preferred embodiments of the present invention will now be described while referring to the accompanying drawings.

(First Embodiment)

Fig. 1 is a diagram showing the arrangement of the essential portion of an image correction apparatus according to a first embodiment of the present invention.

00347844-052590-44827E60

The image correction apparatus in Fig. 1 comprises: an image inputting unit 2, an image outputting unit 3, an image buffer 4, an input device profile holding unit 5, an output target film profile holding unit 6, an input/output device selecting unit 7, a lookup table preparing unit 8, a lookup table holding unit 9, an image correcting unit 10, an edge emphasis processing unit 12, and an image buffer 13 for copy.

10 The image inputting unit 2 reads data from an input image 1, and writes the data in the image buffer 4. The image outputting unit 3 writes, as an output image, the data stored in the image buffer 4 wherein the image data are held. The input device profile
15 holding unit 5 holds profiles for several types of input devices and for an input device that is currently being selected. The output target film profile holding unit 6 holds profiles for several types of films to be output and an output film that is currently being
20 selected. The input/output device selecting unit 7 selects an input device and stores the selected input device type in the input device profile holding unit 5, and selects an output target film and stores the selected film type in the output target film profile
25 holding unit 6. The lookup table preparing unit 8 prepares a lookup table by employing the data stored in the input device profile holding unit 5 and in the

005250"44827E60

output target film profile holding unit 6, and stores
the lookup table in the lookup table holding unit 9.
Based on the lookup table held in the lookup table
holding unit 9, the image correcting unit 10 corrects
5 image data stored in the image buffer 4. The edge
emphasis processing unit 12 emphasizes the edge of a
highlighted portion. The image buffer 13 used for copy
is used for the temporarily storage of a copy of the
image data held in the image buffer 4 when the edge
10 emphasis processing is performed.

The operation of the image correction apparatus
can be implemented by supplying to a personal computer,
for example, a program for performing, or for
exercising control of the operations of the individual
15 sections. In this case, the CPU of the personal
computer performs, or exercises control of the
individual section operations based on the contents of
the supplied program.

The first embodiment of the present invention will
20 now be described in detail by employing a specific
example.

Fig. 2 is a flowchart showing the processing for
the first embodiment.

At step S11, an input image is read from the image
25 inputting unit 2, and the image data are stored in the
image buffer 4.

At step S12, the lookup table preparing unit 8

09317844.05399
665250.4482660

prepares a lookup table. The detailed operation of the lookup table preparing unit 8 will be described later while referring to Fig. 5.

At S13, the image correcting unit 10 corrects an image. The detailed operation of the image correcting unit 10 will be described later while referring to Fig. 7.

At step S14 the edge emphasis processing unit 12 performs an operation to emphasize the edge of a highlighted portion. The detailed operation performed by the edge emphasis processing unit 12 will be described later while referring to Fig. 11.

At step S15 the contents of the image buffer 4 are written to the output image buffer 11 by the image outputting unit 3.

Fig. 3 is a diagram showing the data structure of an input device profile held in the input device profile holding unit 5.

The input device profile has a two-dimensional data structure that consists of the patch numbers of individual gray scales, and the corresponding RGB values of input devices. When the number of input device types is increased, only the RGB values for individual patches of corresponding gray scales need be measured and added to the table.

The type of device that is currently being selected is also held in the input device profile

00347844-05399

holding unit 5. This device type can be changed by the input/output device selecting unit 7. In the initial state, either one of the devices is selected.

Fig. 4 is a diagram showing the data structure of an output target film profile that is held in the output target film profile holding unit 6.

The output target film profile has a two-dimensional data structure that consists of the number of patches of gray scales and the corresponding RGB values of output target films. When the number of output target film types is increased, only the RGB values for the patches corresponding to the gray scales need be measured and added to the profile.

The type of film that is currently being selected is also held in the film profile holding unit 6. The film type can be changed by the input/output device selecting unit 7. In the initial state, either one of the devices is selected.

The operation performed by the input/output device selecting unit 7 is shown in Fig. 10.

At step S41, the name of an input device is selected and is stored in the input device profile holding unit 5. When, for example, a profile conforming to the ICC standard is added to the input image data, the name of the input device is automatically selected based on the header information for the profile. When a profile is not added to the

5

10

15

20

25

converted into data for the output target film profile.
The individual points at which data are not stored in
the profile are linearly interpolated with each other,
and conversion data are prepared. At both ends, points
5 (255, 255) and (0, 0) are linearly interpolated.

Although linear interpolation is employed for this
embodiment, non-linear interpolation using a spline
curve or a Bezier curve may be employed.

At step S22, the obtained lookup table is stored
10 in the lookup table holding unit 9.

Fig. 7 is a flowchart showing the processing
performed by the image correcting unit 10. This is a
detailed diagram of the operation performed at step S13
in Fig. 2.

At step S31, image data for one pixel are read
15 from the image buffer 4 and are corrected by referring
to the lookup table held in the lookup table holding
unit 9, and are then used to overwrite data recorded in
the image buffer 4.

As is described above, for the image correction
20 process performed in this embodiment, tone reproduction
and color reproduction are corrected in accordance with
the tone reproduction for the output target film.

In this embodiment, a lookup table is prepared for
25 each color component in order to increase the speeds at
which the lookup table is prepared and for preparing
the lookup table and at which image data is corrected.

09347844 05599
665550 4487860

Furthermore, data concerning gray scales are stored in a profile in order to quickly prepare the lookup table with which both tone reproduction and color reproduction can be preferably corrected. As a result, the gray level that is important for the reproduction of tones can be preferably reproduced by using the gray scales, and the color balance can be corrected.

Fig. 11 is a flowchart showing the processing performed by the edge emphasis processing unit 12.

10 This is a detailed diagram of the operation performed at step S14 in Fig. 2.

When at step S13 an image is corrected by using the lookup table prepared at step S12 in Fig. 2, the colors that are reproduced for an output image can resemble those for the selected film. Generally, however, in a highlighted portion the operation performed at step S13 tends to sacrifice individual color component tones in order to obtain a preferable contrast for these color components in a half-tone portion. Therefore, the edge emphasis processing unit is employed to compensate for the lack of tones in the highlighted portion.

First, at step S51 RGB luminance data for one pixel are read from the image buffer 4.

25 At step S52, for each RGB pixel the obtained RGB luminance data are compared with a threshold value. When all the RGB luminance data are smaller than the

09317844-05599

threshold value, or are for pixels at the ends of an image, program control moves to step S54. In the other case, program control goes to step S53.

5 At step S53, a 3 x 3 edge emphasis filter is used to filter color component data that are equal to or greater than the threshold value. Color component data that are smaller than the threshold value are not filtered.

10 At step S54, the obtained RGB luminance data are written in the image buffer 13 for copy. When the edge emphasis processing is not performed, the RGB data fetched at step S51 are written unchanged in the image buffer 13.

15 At step S55, a check is performed to determine whether all the pixels have been processed. When all the pixels have been processed, program control advances to step S56. When all the pixels have not been processed, program control returns to step S51.

20 At step S56 all the contents of the image buffer 13 for copy are copied to the image buffer 4.

The threshold value used at step S52 may be the same for all the color components, or may differ for each color component.

25 According to the first embodiment, an image obtained by a specific input device can resemble an image reproduced using a specific film. For example, a lookup table is prepared with which the tone

0537344-05339
65330-4482650

characteristic for an input device in Fig. 8 is converted into a tone characteristic for a silver halide film shown in Fig. 9, so that an image obtained by a specific device can approximate an image reproduced by using a specific silver halide film. As a result, preferable tone reproduction and desired color reproduction can be easily implemented. The desired color reproduction is a very effective means for enhancing the quality of an image recorded by an input device, such as a digital camera.

Since a plurality of output target film profiles are stored, the characteristics of various films can be coped with. Thus, the tone reproduction and color reproduction desired by a user can be provided.

There are many input device types and also many color shifting methods for obtaining preferable color reproduction. In this embodiment, therefore, an input device profile and an output target film profile are separately stored in order to cope with various combinations of an input device and an output target film. Further, when the number of input device types and the number of output target files are increased, only the profiles of corresponding devices or films need be added.

Since an image obtained by an input device is so corrected that tones and colors of the image are similar to those produced by using a silver halide

0931344 0559
66550 448260

film, and since edge emphasis processing is performed to obtain preferable tones in a highlighted portion, an image having a high quality can be output.

(Second Embodiment)

5 For image correction in a second embodiment, in addition to the processing explained for the first embodiment, a lookup table is prepared based on a histogram for an input image.

10 The second embodiment will now be described while referring to the accompanying drawings. No detailed explanation will be given for arrangements and processing that correspond to those in the first embodiment.

15 Fig. 12 is a diagram illustrating the arrangement of the essential portion of an image correction apparatus according to the second embodiment of the present invention.

20 The image correction apparatus in Fig. 12 comprises: an image inputting unit 2, an image outputting unit 3, an image buffer 4, an input device profile holding unit 5, an output target film profile holding unit 6, an input/output device selecting unit 7, a lookup table preparing unit 8, a lookup table holding unit 9, an image correction unit 10, an edge
25 emphasis processing unit 12, an image buffer 13 for copy, a histogram preparing unit 14, and a histogram holding unit 15.

665550" 44827660

The image inputting unit 2 fetches data from an input image 1 and writes them in the image buffer 4, and the image outputting unit 3 writes to an output image 11 data written in the image buffer 4, which is used to store image data. The input device profile holding unit 5 holds profiles for several input device types and for an input device that is currently selected. The output target film profile holding unit 6 stores profiles for several output film types and for an output film that is currently selected. The input/output device selecting unit 7 selects an input device and stores its name in the input device profile holding unit 6, and also selects an output target film and stores its name in the output target film profile holding unit 6. Based on a histogram stored in the histogram holding unit 15, the lookup table preparing unit 8 calculates parameters required for correction, and prepares a lookup table and stores it in the lookup table holding unit 9. Also, based on data stored in the input device profile holding unit 5 and the output target film profile holding unit 6, the lookup table preparing unit 8 prepares a lookup table and stores it in the lookup table holding unit 9, which is used to store lookup tables. The image correcting unit 10 synthesizes the two types of tables stored in the lookup table holding unit 9 and corrects an image stored in the image buffer 4. The edge emphasis

005250-44827E60

processing unit 12 emphasizes the edges of a highlighted portion. The image buffer 13 for copy is used to temporarily copy the contents of the image buffer 4 to perform edge emphasis processing. The histogram preparing unit 14 prepares a histogram based on image data stored in the image buffer 4 and stores the histogram in the histogram holding unit 15. The histogram holding unit 15 is used to store the histogram for all the image data.

The image correction apparatus can be implemented by supplying to a personal computer, for example, a program for performing, or for exercising control of the operations of the individual sections in Fig. 12. In this case, the CPU of the personal computer performs, or exercises control of the individual section operations based on the contents of the supplied program.

The processing performed for the second embodiment will now be described in detail by employing a specific example.

<Image processing in the second embodiment>

Fig. 13 is a flowchart showing the processing for the second embodiment.

At step S201, an input image 1 is fetched from the image inputting unit 2, and the image data are stored in the image buffer 4.

At step S202, the histogram preparing unit 14

prepares a histogram based on the image data stored in the image buffer 4, and stores the histogram in the histogram holding unit 15. The detailed operation of the histogram preparing unit 14 will be described later while referring to Fig. 14.

At step S203, the lookup table preparing unit 8 prepares a lookup table. The detailed operation of the lookup table preparing unit 8 will be described later while referring to Fig. 16.

At step S204, the image correcting unit 10 corrects an image. The detailed operation of the image correcting unit 10 will be described later while referring to Fig. 18.

At step S205, the edge emphasis processing unit 12 emphasizes the edges of the highlighted portion in the same manner as described in the first embodiment.

At step S206, the contents of the image buffer 4 are written to the output image buffer 11 by the image outputting unit 3.

<Histogram preparing process>

The operation performed by the histogram preparing unit 14 is shown in Fig. 14, which is a detailed flowchart of step S220 in Fig. 13.

At step S211, image data for one pixel are extracted from the image buffer 4. The luminance (R, G, B) for each of the RGB color components is stored as image data.

At step S212 the RGB image data values are employed to calculate luminance L for a relevant pixel by using the following equation.

$$L = (3 \cdot R + 6 \cdot G + 1 \cdot B) / 10$$

5 At step S213, the histogram stored in the histogram holding unit 15 is updated. The histogram holding unit 15 holds histogram HistL for the obtained luminance L, and HistR, HistG and HistB in which the cumulative luminance values of the RGB colors are
10 stored in accordance with the luminance L of the relevant pixel. The histograms are all set to 0 in the initial state.

Updating of the histogram is performed as follows.

15 HistR[L] = HistR[L] + R
 HistG[L] = HistG[L] + G
 HistB[L] = HistB[L] + B
 HistL[L] = HistL[L] + 1

At step S214, a check is performed to determine whether all the pixels have been processed. When all
20 the pixels have been processed, the processing is thereafter terminated. When not all the pixels have been processed, program control returns to step S211.

The histogram HistL that is prepared is shown in Fig. 15.

25 <Lookup table preparation process>

The operation performed by the lookup table preparing unit 8 is shown in Fig. 16, which is a

091744-0539
665250-4432650

detailed flowchart for step S203 in Fig. 13.

At step S221, the maximum luminance of an image is obtained from the histogram stored in the histogram holding unit 15. Thus, for the histogram in Fig. 15 the maximum luminance is 252.

At step S222, the luminance LH' , obtained by subtracting from 255 a predetermined value (10 in Fig. 15), is compared with the maximum luminance. That is, in this example, the values 255, 245, 235, . . . are obtained by subtraction, and each resultant value is compared with the maximum luminance value. In Fig. 15, $LH' = 245$. When the maximum luminance value is greater than the luminance LH' , an area including pixels at a predetermined ratio (in Fig. 15, 1% of the total pixels) is obtained. The minimum luminance in that area is defined as a highlighted point LH ($LH = 234$ in Fig. 15). The average luminance (RH , GH , BH) of RGB in an area wherein the luminance is equal to or higher than LH and equal to or lower than LH' is calculated by using the following equations.

$$RH = \sum_{m=LH}^{LH'} HistR[m] / \sum_{m=LH}^{LH'} HistL[m]$$

$$GH = \sum_{m=LH}^{LH'} HistG[m] / \sum_{m=LH}^{LH'} HistL[m]$$

$$BH = \sum_{m=LH}^{LH'} HistB[m] / \sum_{m=LH}^{LH'} HistL[m]$$

At step S223, the minimum luminance level of an
5 image is obtained from the histogram HistL stored in
the histogram holding unit 4. The minimum luminance is
5, according to the histogram in Fig. 15.

At step S224, a predetermined value (10 in Fig.
15) is added to the luminance level, beginning with 0,
and the resultant value LS' is compared with the
minimum luminance level obtained at step S223. When
the minimum luminance is smaller than the luminance LS'
(10 in Fig. 15), an area including pixels at a
predetermined ratio (in Fig. 15, 1% of the total
15 pixels) is acquired. The maximum luminance in that
area is defined as a shadow point LS (LS = 22 in Fig.
15). The average luminance (RS, GS, BS) of RGB in an
area wherein the luminance is equal to or higher than
LS' and equal to or lower than LS is calculated by
20 using the following equations.

$$RS = \sum_{m=LS'}^{LS} HistR[m] / \sum_{m=LS'}^{LS} HistL[m]$$

$$GS = \sum_{m=LS'}^{LS} HistG[m] / \sum_{m=LS'}^{LS} HistL[m]$$

25

$$BS = \sum_{m=LS'}^{LS} HistB[m] / \sum_{m=LS'}^{LS} HistL[m]$$

At step S225, lookup tables LUTR, LUTG and LUTB
5 for individual RGB values are prepared by using the
obtained RH, GH, BH, RS, GS and BS. The thus prepared
lookup tables, for which a detailed explanation will be
given later, are shown in Fig. 17A. These tables are
stored in the lookup table holding unit 9.

10 At step S226, based on the profiles selected for
the input device and the output target film by the
input/output device selecting unit 7, one-dimensional
lookup tables LUTRDD, LUTGDD and LUTBDD are prepared
for individual RGB color components in the same manner
15 as in the first embodiment. The thus prepared lookup
tables, for which an explanation will be given later,
are shown in Fig. 17B.

At step S227, the obtained lookup tables are
stored in the lookup table holding unit 9.

20 The lookup tables LUTR, LUTG and LUTB, shown in
Fig. 17A, are used to correct the color contrast and
for the assimilation of color. In this embodiment,
gamma for highlighting is set in the descending order
G, B and R. Since G and B are exaggerated relative to
25 R, the assimilation of color (color fog) of an image
that appears bluish can be corrected. At the same
time, the color contrast can be corrected.

The lookup table in Fig. 17B is the table with which data from the input device profile corresponding to the same patch are converted into data for the output target film profile. The points for which no data are stored in the profile are linearly interpolated and conversion data are prepared. At both ends, points (255, 255) and (0, 0) are linearly interpolated. While linear interpolation is employed in this embodiment, non-linear interpolation using a spline curve or a Bezier curve, for example, may be employed.

<Image correction process>

The processing performed by the image correcting unit 10 is shown in Fig. 18, which is a detailed flowchart for step S204 in Fig. 13.

At step S231 new lookup tables are prepared by synthesizing the two types of lookup tables stored in the lookup table holding unit 9 using the following equations.

20 $LUTTmpR[i] = LUTRDD[LUTR[i]]$
 $LUTTmpG[i] = LUTGDD[LUTG[i]]$
 $LUTTmpB[i] = LUTBDD[LUTB[i]]$

In these equations, i is a value that is equal to or greater than 0, and is equal to or smaller than the maximum luminance value.

At step S232, image data for one pixel is extracted from the image buffer 4. Individual RGB

luminance values (R, G, B) are stored as image data.

At step S233, the image data extracted from the image buffer 4 are corrected based on the obtained lookup tables LUTRTmp, LUTGTmp and LUTBTmp, and the resultant image data are used to overwrite the original location.

$$R = \text{LUTTempR}[R]$$
$$G = \text{LUTmpG}[G]$$

```
B = LUTTmpB[B]
```

10 At step S234, a check is performed to determine
whether image data for all the pixels have been
corrected. When the correction process has been
completed for all the pixels, the processing is
thereafter terminated. When the correction process has
15 not been completed for all the pixels, program control
returns to step S232.

As is described above, in the image processing for this embodiment, optimal correction provided for white balance and for color contrast is performed for each image, and tone reproduction and color reproduction are corrected in accordance with the tone reproduction characteristics of the output target film.

In this embodiment, a lookup table is prepared for each color component in order to increase the speeds for the preparation of a lookup table and for image correction. In addition, data concerning a gray scale is stored in a profile, so that a lookup table can be

quickly prepared with which both tone reproduction and color reproduction can be preferably corrected. By employing the gray scale, the gray level that is important for tone reproduction can be preferably reproduced, and color balance can be corrected.

In this embodiment, digital values of 0 to 255 are employed to describe luminance data; however, the maximum data value is not limited to 255, and instead of the luminance value, printing dot density may be employed.

Further, at step S212 the luminance value is calculated by weighting the luminance value at a ratio of R:G:B = 3:6:1; however, other weighting may be employed for the calculation, or the average of a maximum RGB value and a minimum RGB value may be employed.

(Third Embodiment)

In a third embodiment, an image correction process is changed in accordance with whether an input device is a digital camera.

Since correction for color assimilation and contrast based on the histogram explained in the second embodiment is a process employing the distribution of colors for an input image, regardless of the input device, preferable results can be obtained. However, since the digital development correction as explained in the first and the second embodiments is a process

for adjusting the tone characteristics of an output image to conform to the tone characteristics of an arbitrary film, the quality of an output image may be deteriorated if the input image has the tone characteristics of the relevant film. In other words, digital development may not be good for a silver halide image that is read by a scanner, or an image that is read by a film scanner.

Therefore, in this embodiment, when an input device is a digital camera, the same process as in the second embodiment is performed, and when the input device is not a digital camera, only the correction of color assimilation and contrast is performed; digital development correction is not performed.

No detailed explanation will be given for arrangements and processing that correspond to those in the first and the second embodiments.

Fig. 19 is a diagram showing the arrangement of the essential portion of an image correction apparatus according to the third embodiment.

The image correction apparatus in Fig. 19 comprises: an image inputting unit 2, an image outputting unit 3, an image buffer 4, an input device profile holding unit 5, an output target film profile holding unit 6, an output device selecting unit 7, a lookup table preparing unit 8, a lookup table holding unit 9, an image correcting unit 10, an edge emphasis

The image inputting unit 2 fetches data from an input image 1, and writes them in the image buffer 4. The image outputting unit 3 writes data stored in the image buffer 4 to an output image 11. The image buffer 4 is used to store image data. The input device profile holding unit 5 holds profiles for several input device types and for an input device that is currently selected. The output target film profile holding unit 6 stores profiles for several output film types and for an output film that is currently selected. The output device selecting unit 7 also selects an output target film and stores its name in the output target film profile holding unit 6. Based on a histogram stored in the histogram holding unit 15, the lookup table preparing unit 8 calculates parameters required for correction, and prepares a lookup table and stores it in the lookup table holding unit 9. Also, when an input device is a digital camera, based on data stored in the input device profile holding unit 5 and the output target film profile holding unit 6, the lookup table preparing unit 8 prepares a lookup table and stores it in the lookup table holding unit 9, which is used for the storage of lookup tables. The image correcting unit 10 corrects an image stored in the

image buffer 4 based on the lookup table stored in the
lookup table holding unit 9. The edge emphasis
processing unit 12 emphasizes the edges of a
highlighted portion. The image buffer 13 for copy is
5 used to temporarily hold a copy of the contents of the
image buffer 4 when edge emphasis processing is
performed. The histogram preparing unit 14 prepares a
histogram based on image data stored in the image
buffer 4, and stores the histogram in the histogram
10 holding unit 15. The histogram holding unit 15 is used
to store the histogram for all the image data. The
image judging unit 16 determines what type of image is
being processed.

An image correction apparatus can be implemented
15 by supplying to a personal computer, for example, a
program for performing, or for exercising control of
the operations of the individual sections in Fig. 19.
In this case, the CPU of the personal computer
performs, or exercises control of the individual
20 section operations based on the contents of the
supplied program.

The third embodiment will now be described in
detail by employing a specific example.

Fig. 20 is a flowchart showing the processing
25 performed for the third embodiment.

At step S301, image data for an input image 1 and
an image header are read by the image inputting unit 2,

09347844-052599

and are stored in the image buffer 4.

At step S302, the image judging unit 16 determines the image type. Specifically, the image judging unit 16 employs an ID entered in the image header to
5 determine whether the input device used for the image was a digital camera or another device.

Fig. 21 is a diagram showing the contents of the image data and the image header stored in the image buffer 4.

10 The ID of the input device is included with the image data, which represent the RGB values of individual pixels, and the image judging unit 16 examines the ID to determine the type of input device, which may be, for example, a digital camera, a file
15 scanner, or a flat bed scanner. An input device profile is automatically selected in accordance with the input device ID stored in the image header.

When, at step S302, it is ascertained that the input device is a digital camera, program control moves
20 to step S303. When the input device is a device other than a digital camera, program control goes to step S308.

At step S303, the histogram preparing unit 14 prepares a histogram based on the image data stored in
25 the image buffer 4 and stores it in the histogram holding unit 15.

At step S304, the lookup table preparing unit 8

09317844-05599

prepares a lookup table.

At step S305, the image correcting unit 10 corrects an image.

At step S306, the edge emphasis processing unit 12 emphasizes the edges of a highlighted portion.

The processes at steps S303 to S306 are the same as those at steps S202 to S205 in Fig. 13 that were explained in the second embodiment.

At step S307, the data in the image buffer 4 are written by the image outputting unit 3 to an output image 11.

At step S308, the histogram preparing unit 14 prepares a histogram based on the image data stored in the image buffer 4 and stores it in the histogram holding unit 15. This process is the same as the one performed at step S303.

At step S309, the lookup table preparing unit 8 prepares a lookup table.

The operation of the lookup table preparing unit 8 when the input device is a digital camera is shown in Fig. 22. The processes at steps S351 to S355 are the same as those at steps S221 to S225 in Fig. 16 that were explained in the second embodiment.

At step S310, the image correcting unit 10 corrects an image. This process is the same as the one performed at step S305.

<Process for changing a selected profile>

659290" 44827E60

The operation of the output device selecting unit 7 is shown in Fig. 23.

At step S361, the name of an output film is selected and is stored in the output target film profile holding unit 6. The name of an output device is selected as the name of an output film in accordance with an instruction that is entered by a user at a user interface that is unique to the image correction apparatus of the present invention.

The selection of the output film name can be performed any time except during the correction process.

In this embodiment, the input device is automatically selected in accordance with the ID of the input device that is stored in the image header of the image data. However, a user may manually select the input device.

(Other Embodiments)

In addition, the scope of the present invention may also include an embodiment wherein software program code for accomplishing the functions of the embodiments is loaded into a computer (a CPU or an MPU) in an apparatus, or in a system, that is connected to various devices in order to operate them, so that the devices are operated by the computer in the system, or in the apparatus, in accordance with the stored program.

In this case, the program code implements the

0917844-05399
665250-4482660

innovative functions provided by the present invention, and the means for supplying the program code to the computer, e.g., the memory medium on which the program code is stored, accomplishes the present invention.

5 A memory medium on which the program code is recorded is, for example, a floppy disk, a hard disk, an optical disk, a magneto optical disk, a CD-ROM, a magnetic tape, a nonvolatile memory card, or a ROM.

10 Another embodiment of the present invention consists of an application wherein, to accomplish the functions of the above embodiments, not only does a computer execute program code that is supplied, but in addition, the program code interacts either with an OS (Operating System) that is running on the computer or
15 with another software program.

20 Furthermore, to accomplish the functions included in the above embodiment, the present invention also provides for program code to be stored in memory mounted on a function expansion board in a computer, or
25 in memory mounted in a function expansion unit connected to the computer, and for, in consonance with instructions included in the program code, a CPU mounted on the function extension board or mounted in the function extension unit to perform a part or all of the processing.

 Although the present invention has been described in its preferred form with a certain degree of

034844-0559
55550-4482E60

particularity, many apparently widely different
embodiments can be devised without departing from the
spirit and the scope of the invention. It is therefore
to be understood that the invention is not limited to
5 specific embodiments described herein, except as
defined in the appended claims.

09317844-052599

WHAT IS CLAIMED IS:

1. An image processing method comprising the steps of:

holding a profile for an input device and a
5 profile for an output target film;

preparing a table to approximate a color
reproducibility of output target film as to a color
reproducibility of the input image data on the basis of
the profile for the input device and the profile for
10 the output target film; and

correcting a color of the input image data by
using the prepared table.

2. An image processing method according to claim
15 1, wherein data corresponding to a gray chart is
described in the profile for the input device and the
profile for the output target film.

3. An image processing method according to claim
20 1, further comprising the step of:

selecting the profile for the input device on the
basis of information added to an input image.

4. An image processing method according to claim
25 1, wherein the table is prepared for each of color
components of the input image data.

0937544-05599
665250-44827650

5. An image processing method comprising the steps of:

correcting a color of input image data by using a table prepared on the basis of a color reproducibility for the input image data and a color reproducibility for an output target film; and

emphasizing an edge in a highlighted portion of the color-corrected image data.

6. An image processing method according to claim 1, further comprising the steps of:

performing a white balance correction using a look up table prepared on the basis of a highlighted point and a shadow point of the input image data; and

performing the color correction for the image data obtained by the white balance correction.

7. An image processing method according to claim 1, further comprising the steps of:

judging a type of an input device type according to an input image; and

determining, in accordance with a result obtained in said judging step, whether the color correction is to be performed.

8. An image processing method according to claim 7, wherein the type of the input device is described as

005250-44827E00

an ID, within header information for the input image.

9. An image processing method according to claim
7, wherein the type of the input device is name of a
5 digital camera, a film scanner or a flat bed scanner.

10. An image processing method according to claim
9, wherein the color correction is performed when the
type of the input device is a digital camera.

10

11. An image processing method according to claim
10, where, when said input device type is a digital
camera, the profile for the input device is
automatically selected in accordance with the name of
15 the device.

12. An image processing apparatus comprising:
holding means for holding a profile for an input
device and a profile for an output target film;

20 preparation means for preparing a table to
approximate a color reproducibility of an output target
film as to a color reproducibility of input image data
on the basis of the profile for the input device and
the profile for the output target film; and

25 color correction means for correcting the color of
the input image data by using the prepared table.

065250"44B2TE60

13. A recording medium on which an image processing program is stored, said program comprising the steps of:

5 reading out a profile for an input device and a profile for an output target film;

preparation means for preparing a table to approximate a color reproducibility of an output target film as to a color reproducibility of input image data on the basis of the profile for the input device and
10 the profile for the output target film; and

correcting the color of the input image data by using the prepared table.

665250" 44827E60

ABSTRACT OF THE DISCLOSURE

Disclosed is an image processing method.

According to the present invention, an image
processing method comprises the steps of retaining on
5 file a profile for an input device and a profile for an
output target film, employing the profiles for the
input device and for the output target film to prepare
a color reproduction table to facilitate the input of
image data that is near that of the output target film,
10 and correcting the colors of the input image data in
accordance with the table that is prepared.

665250 "4427E60

655350 4487E60

FIG. 1

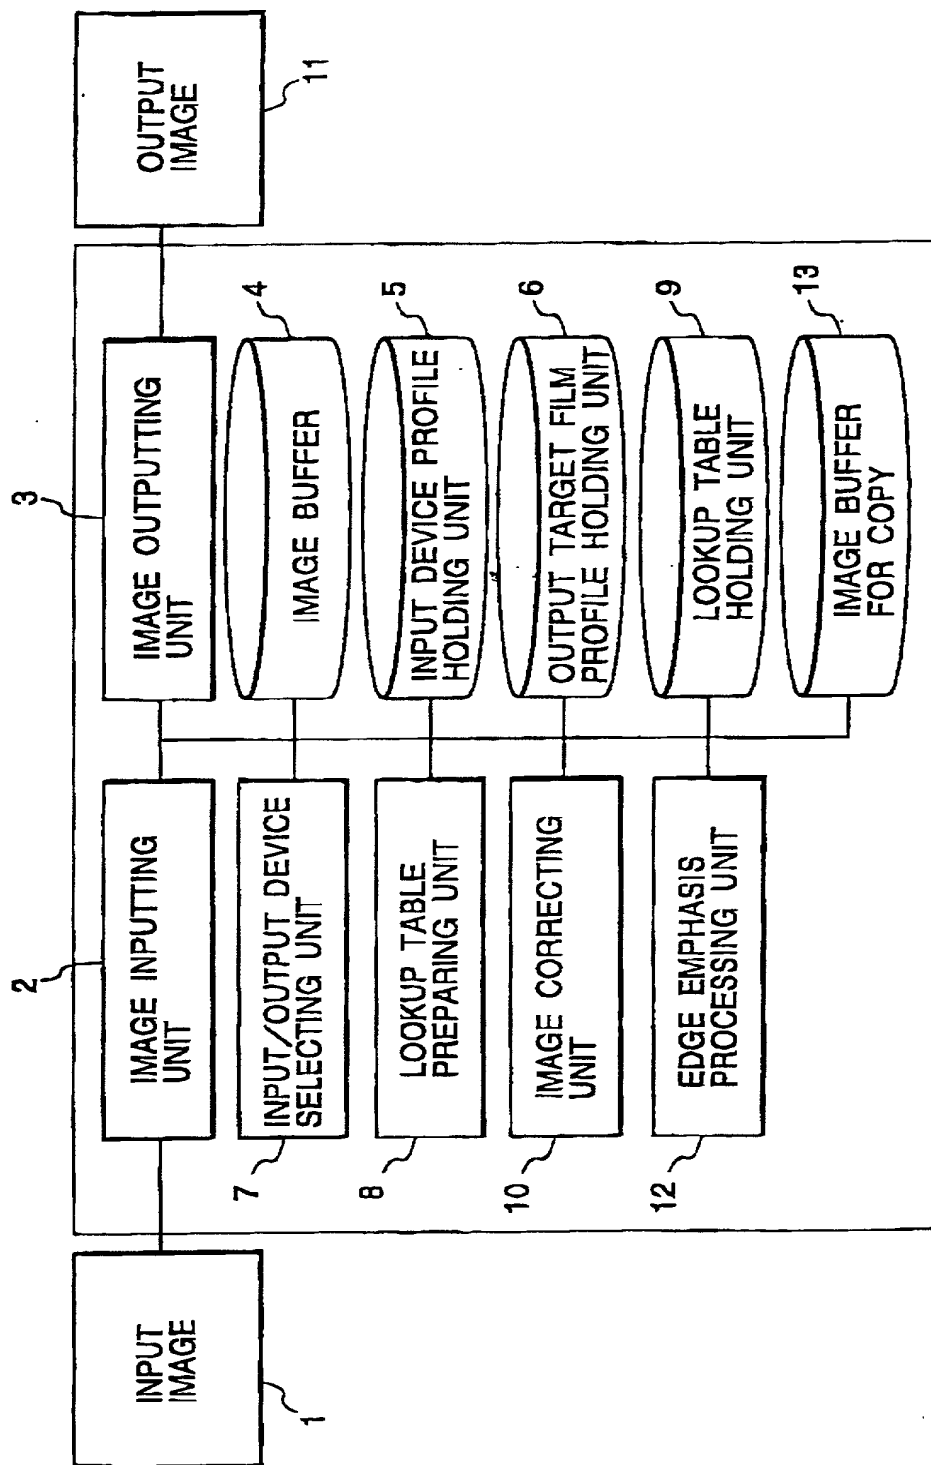
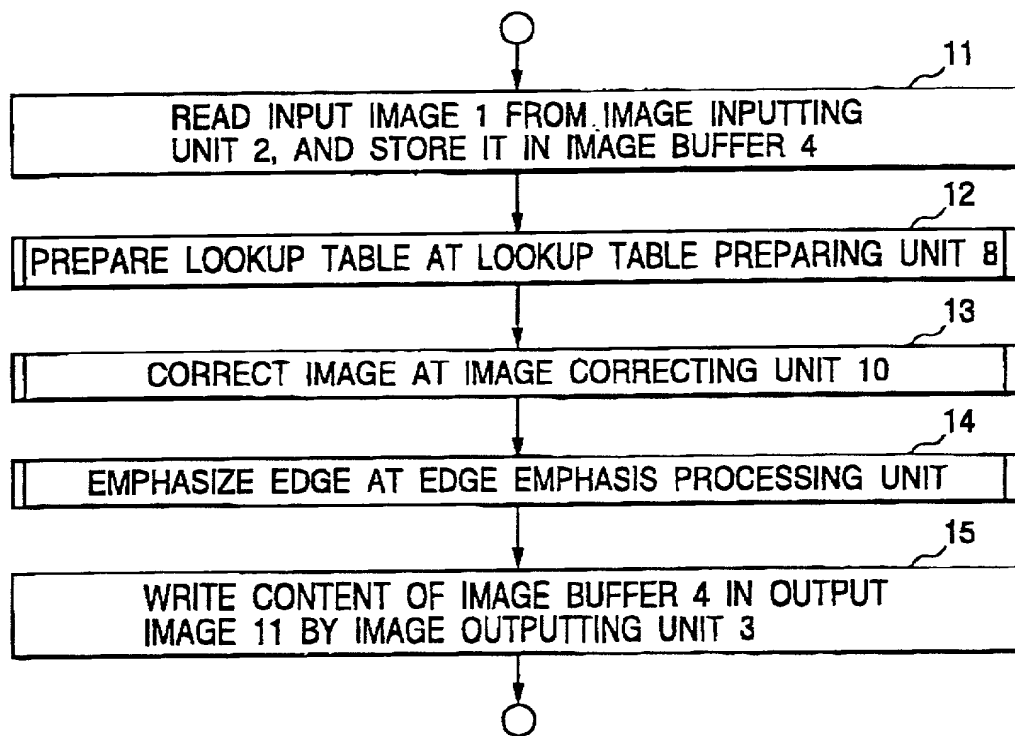


FIG. 2



55550 4432660

FIG. 3

TYPE OF INPUT DEVICE	LUMINANCE				
	PATCH 1	PATCH 2	PATCH 3	PATCH 4
INPUT DEVICE A	R COMPONENT	##	##	##	##
	G COMPONENT	##	##	##	##
	B COMPONENT	##	##	##	##
INPUT DEVICE B	R COMPONENT	##	##	##	##
	G COMPONENT	##	##	##	##
	B COMPONENT	##	##	##	##
INPUT DEVICE C	R COMPONENT	##	##	##	##
	G COMPONENT	##	##	##	##
	B COMPONENT	##	##	##	##

INPUT DEVICE WHICH IS BEING SELECTED

FIG. 4

TYPE OF OUTPUT TARGET FILM		LUMINANCE				
		PATCH 1	PATCH 2	PATCH 3	PATCH 4
FILM A	R COMPONENT	##	##	##	##	##
	G COMPONENT	##	##	##	##	##
	B COMPONENT	##	##	##	##	##
FILM B	R COMPONENT	##	##	##	##	##
	G COMPONENT	##	##	##	##	##
	B COMPONENT	##	##	##	##	##
FILM C	R COMPONENT	##	##	##	##	##
	G COMPONENT	##	##	##	##	##
	B COMPONENT	##	##	##	##	##

FILM WHICH IS BEING SELECTED

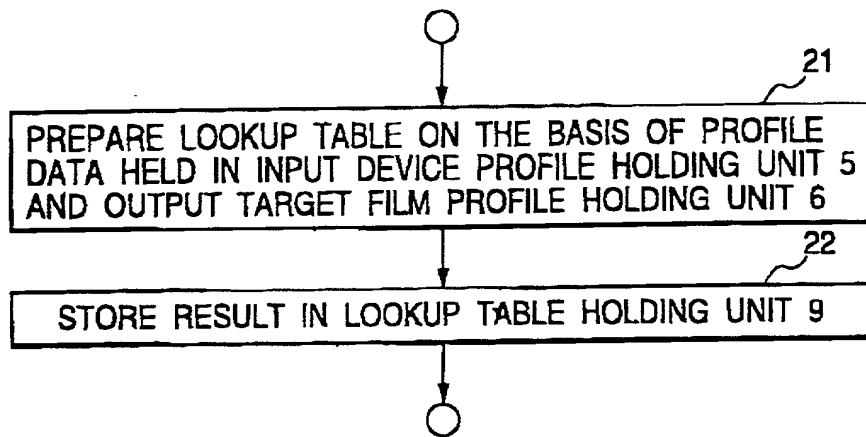
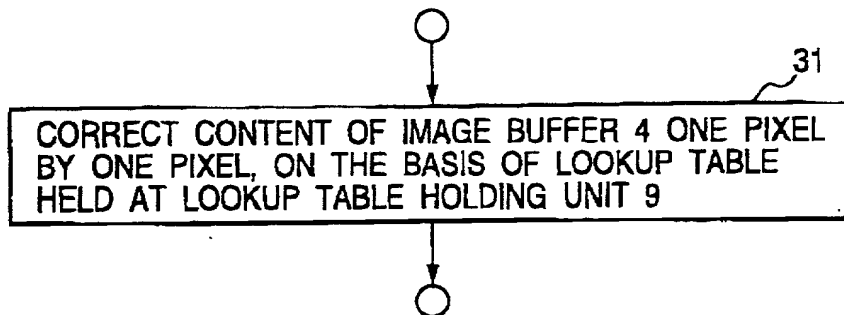
FIG. 5*FIG. 7*

FIG. 6

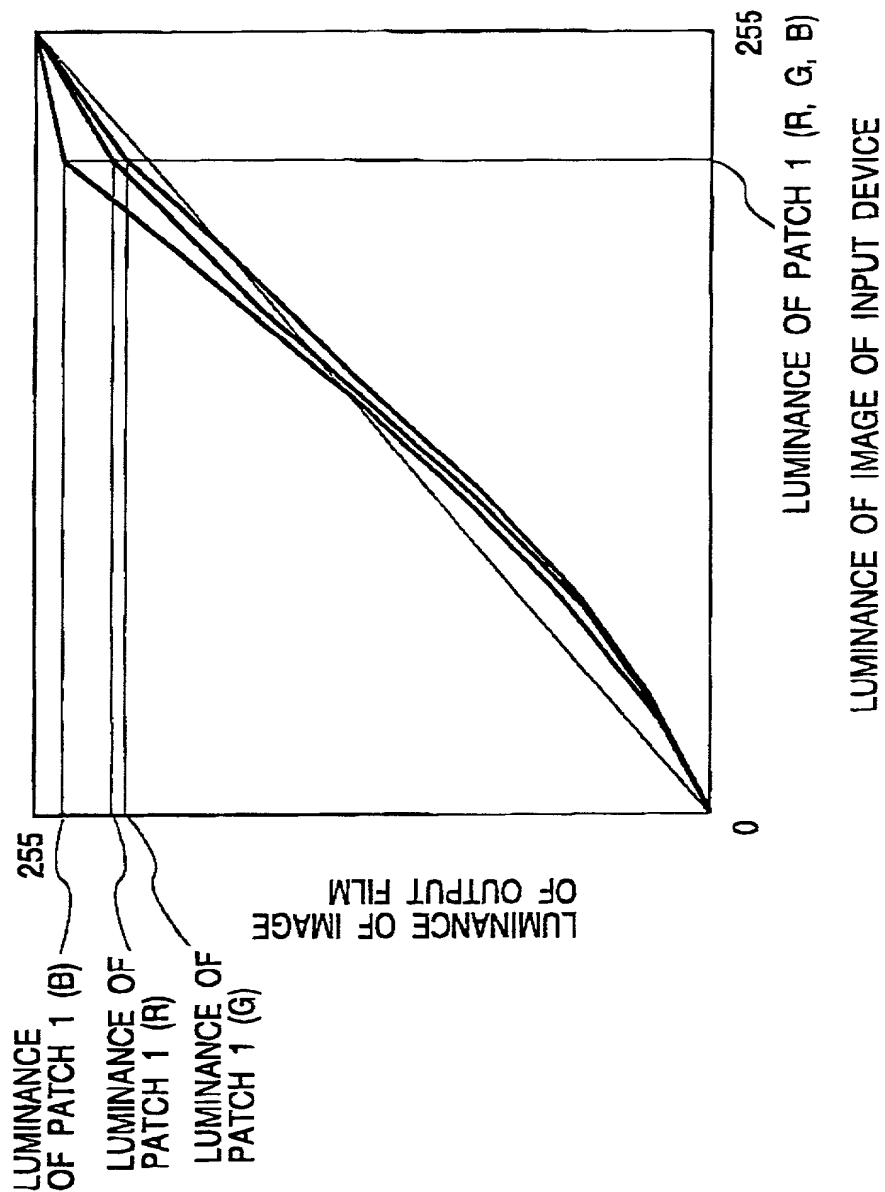


FIG. 8

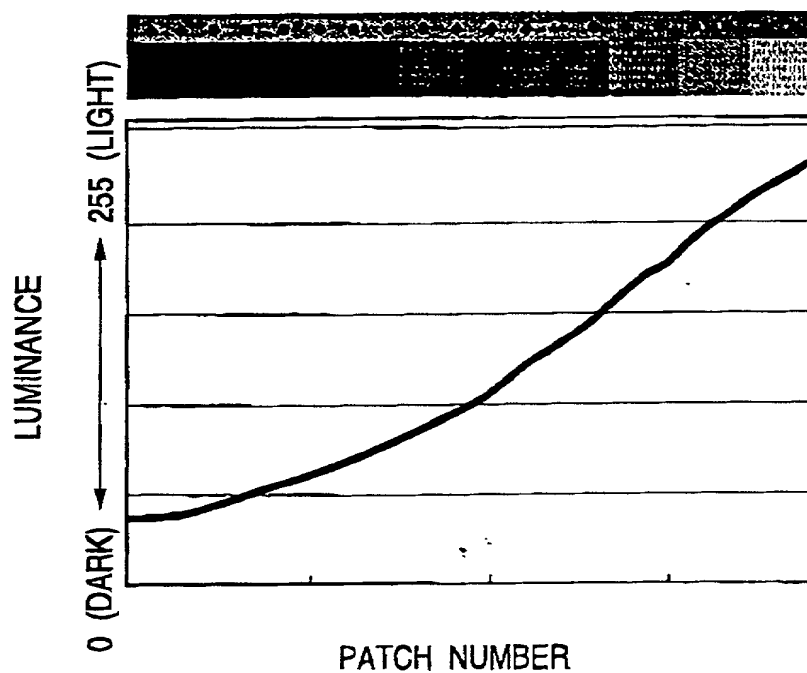


FIG. 9

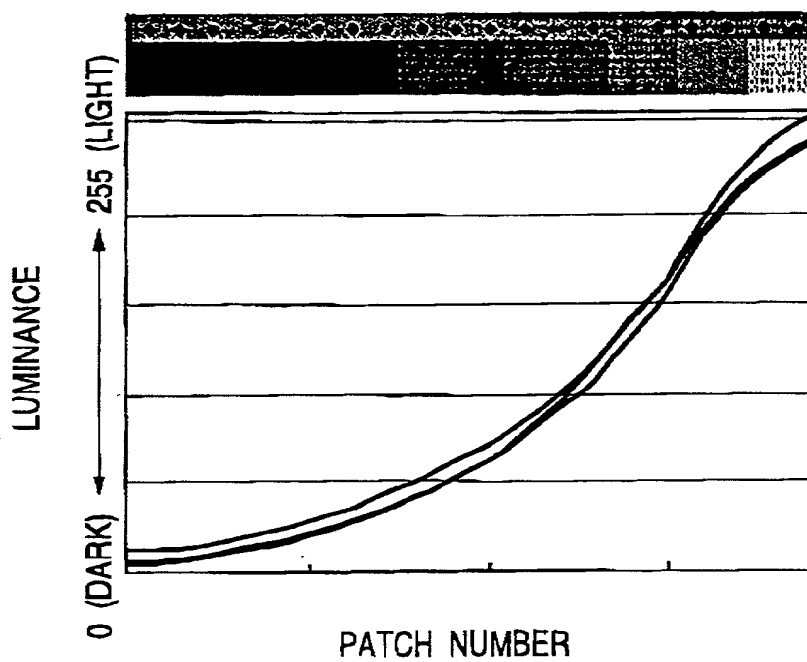


FIG. 10

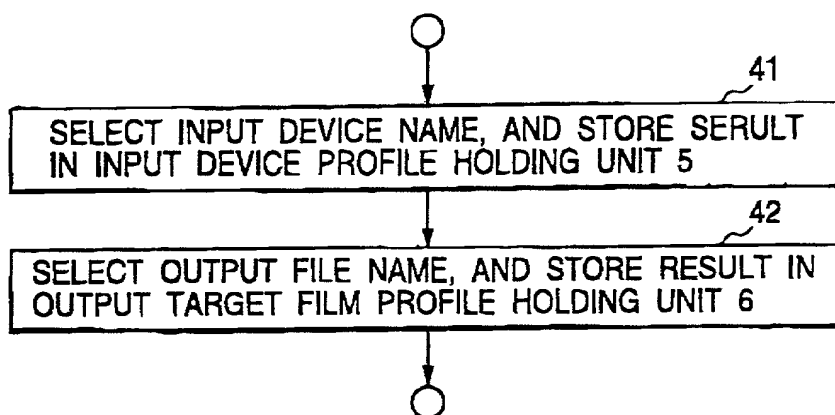


FIG. 11

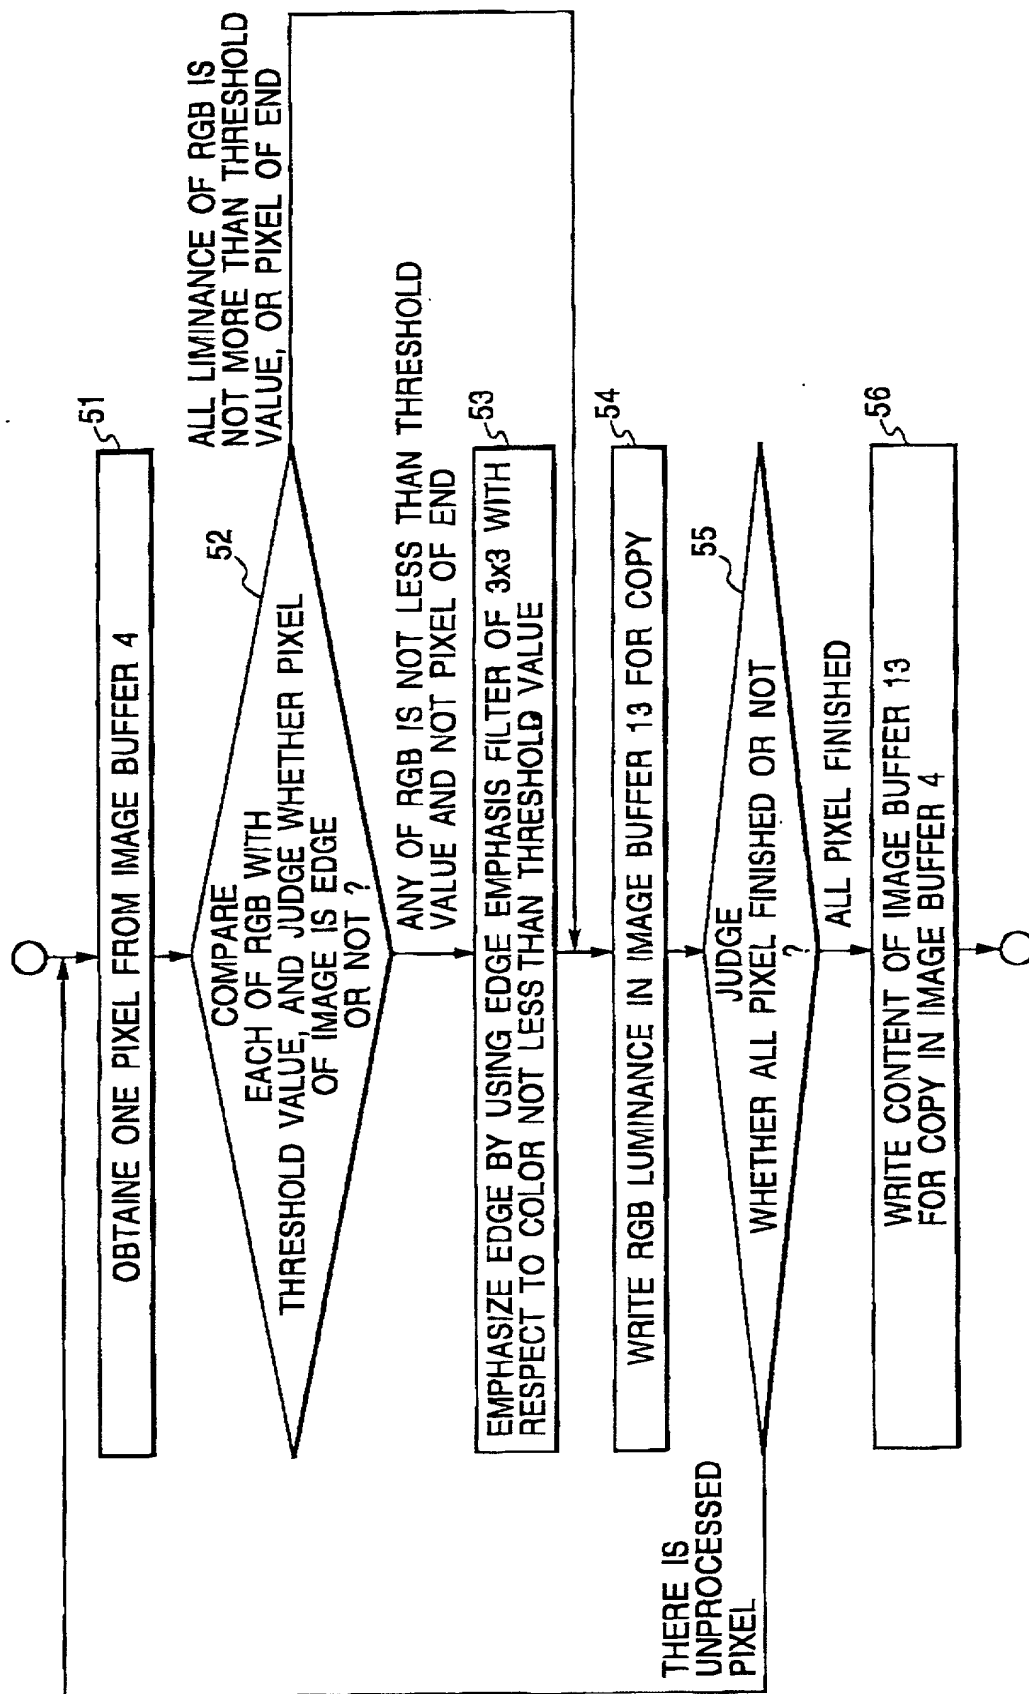
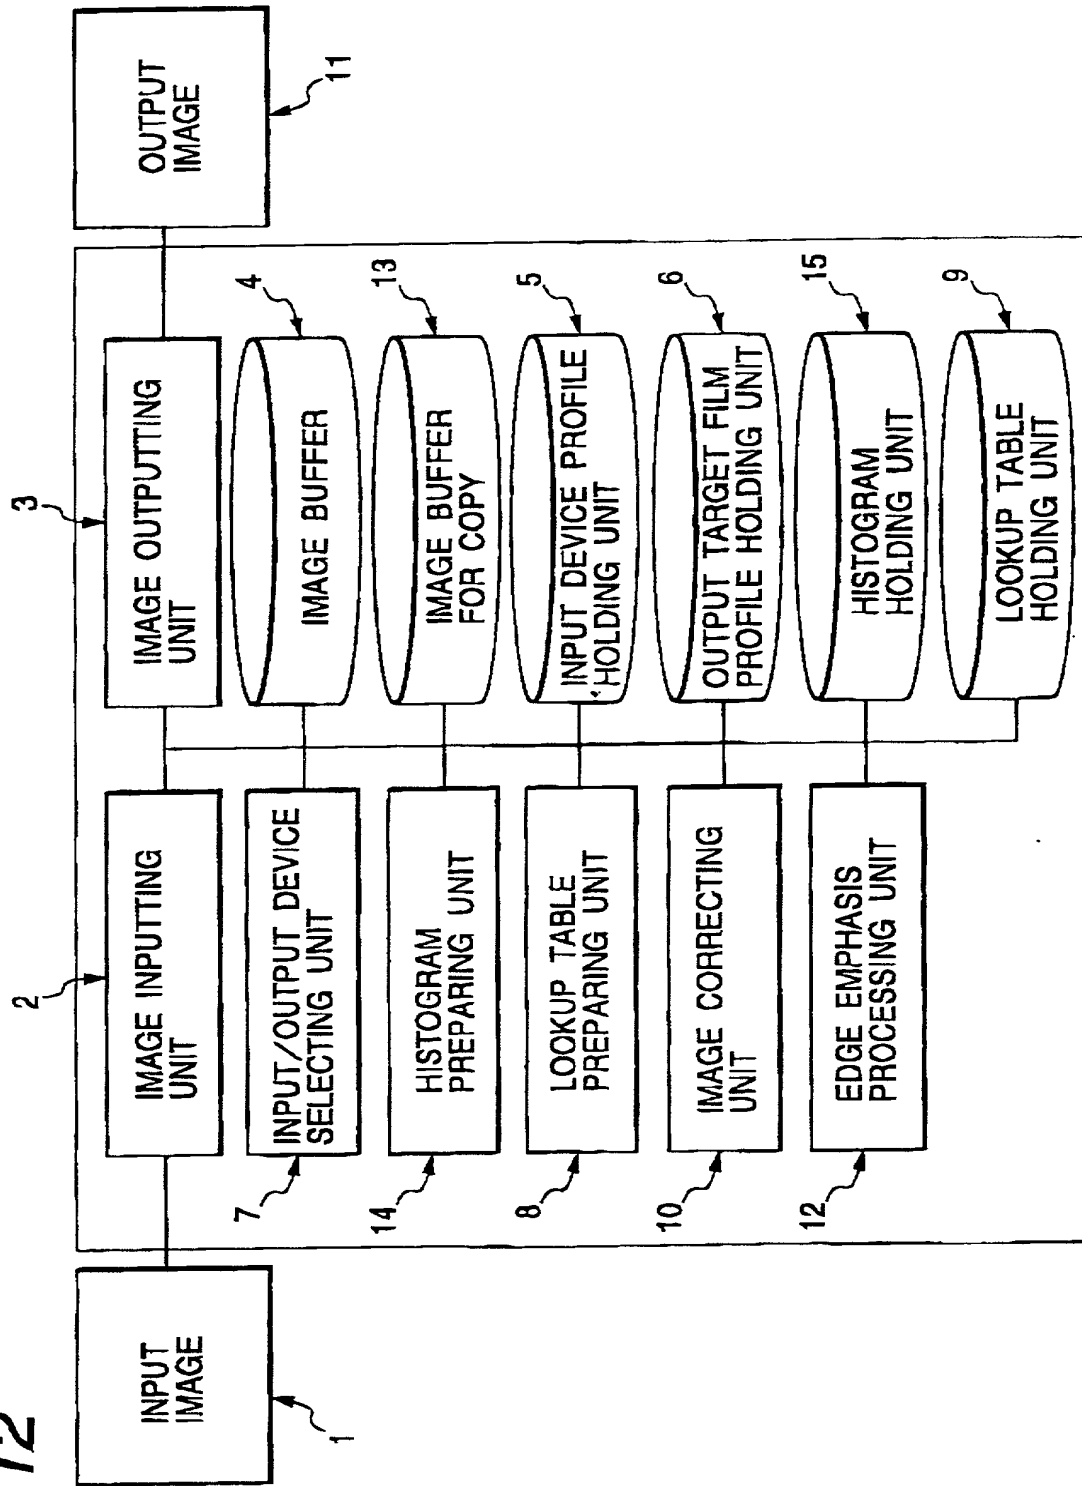


FIG. 12



665250" 44827E60

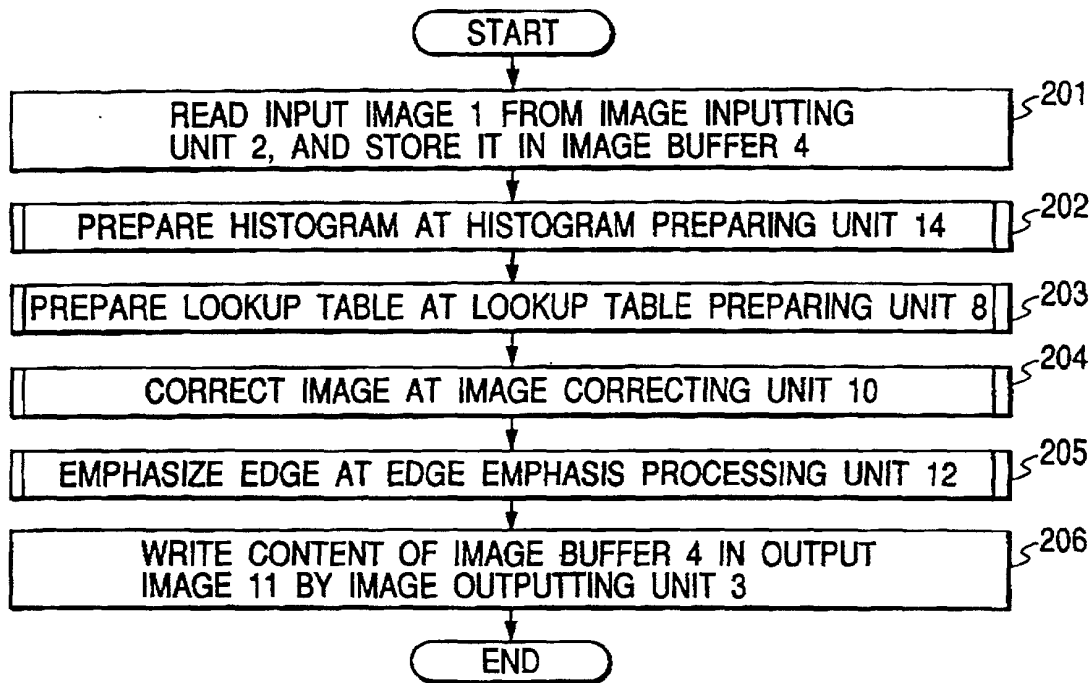
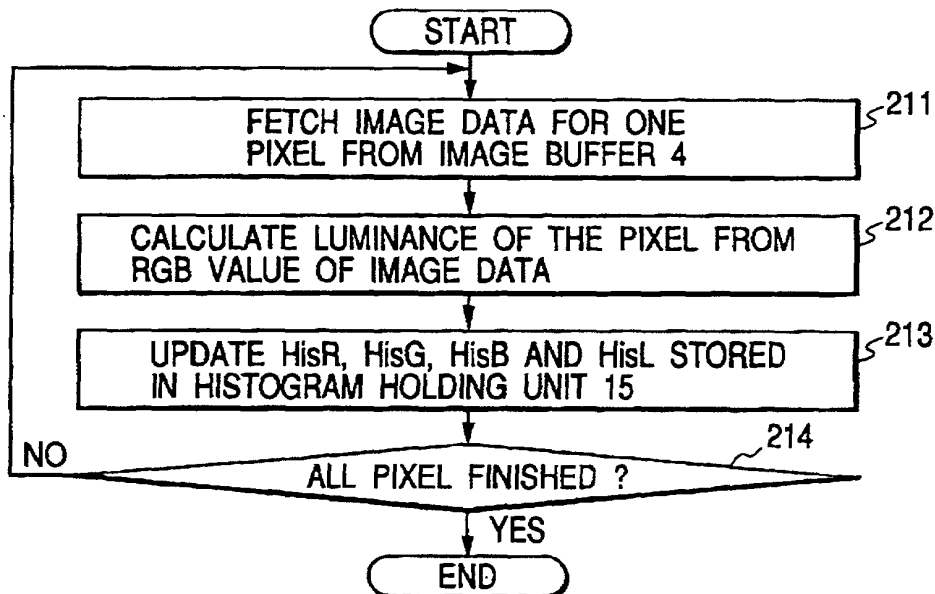
FIG. 13**FIG. 14**

FIG. 15

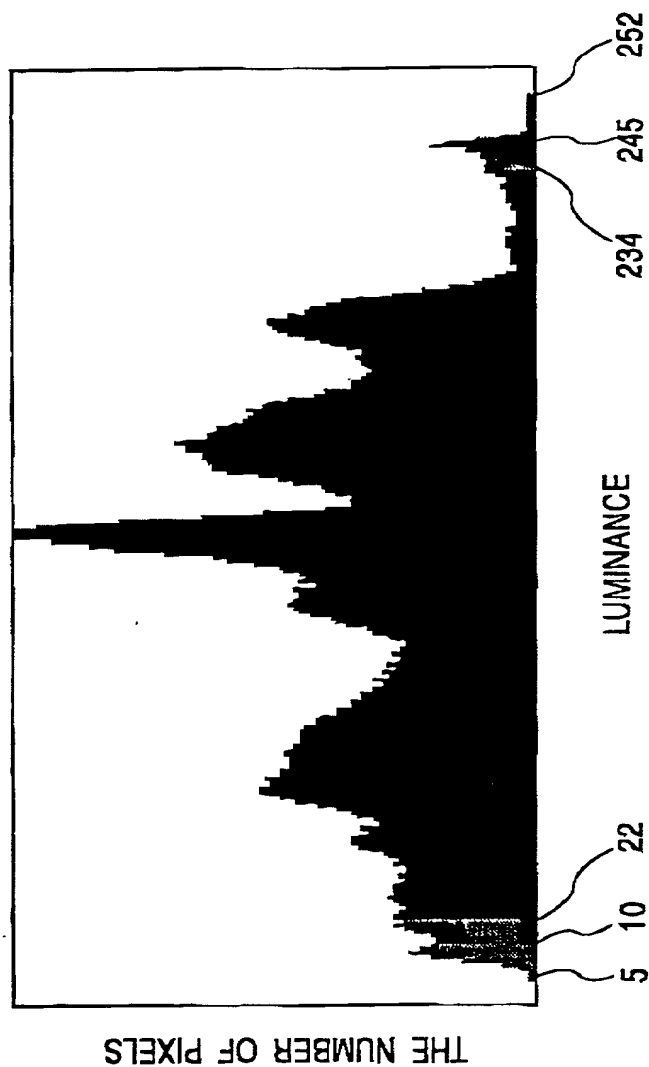


FIG. 16

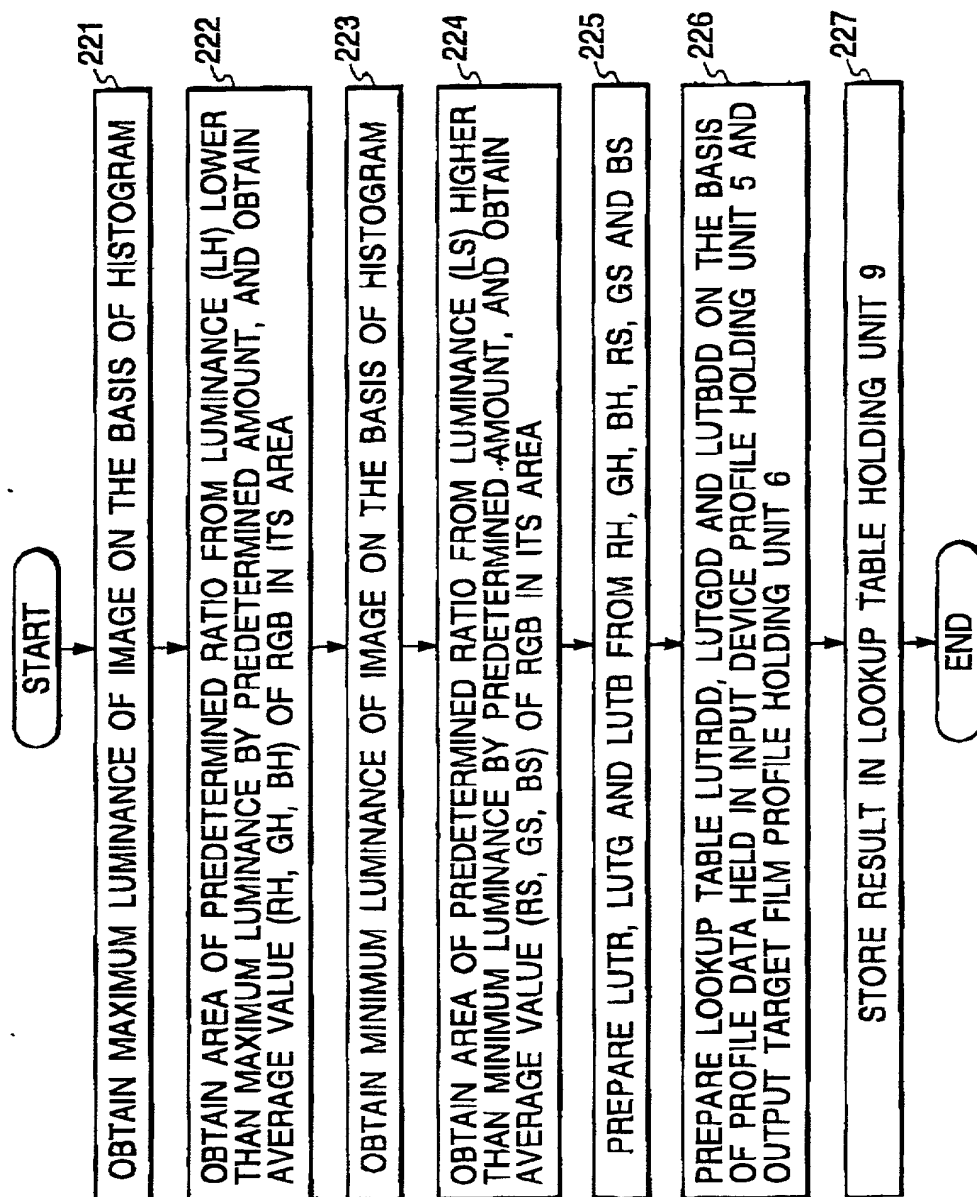
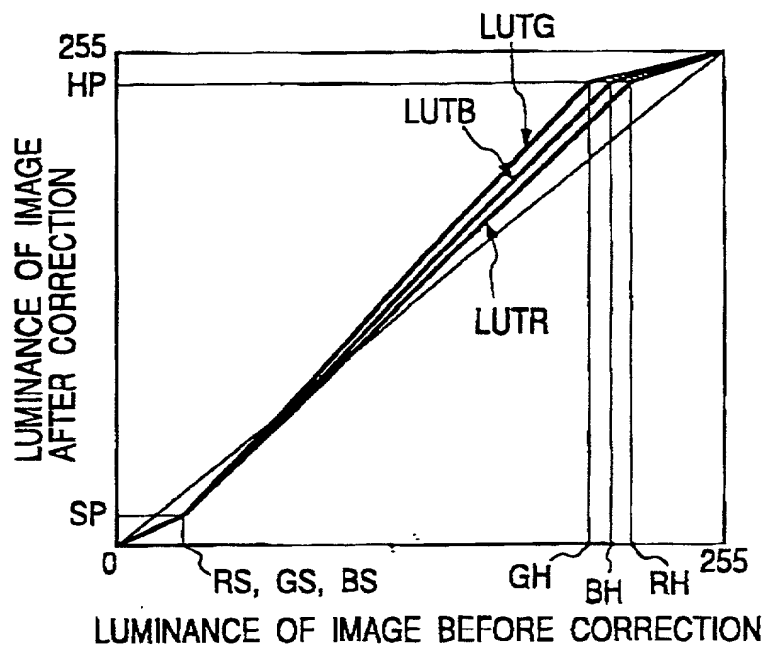


FIG. 17A

LUT FOR CORRECTING COLOR FOG AND CONTRAST

**FIG. 17B**

LUT FOR DIGITAL DEVELOPMENT

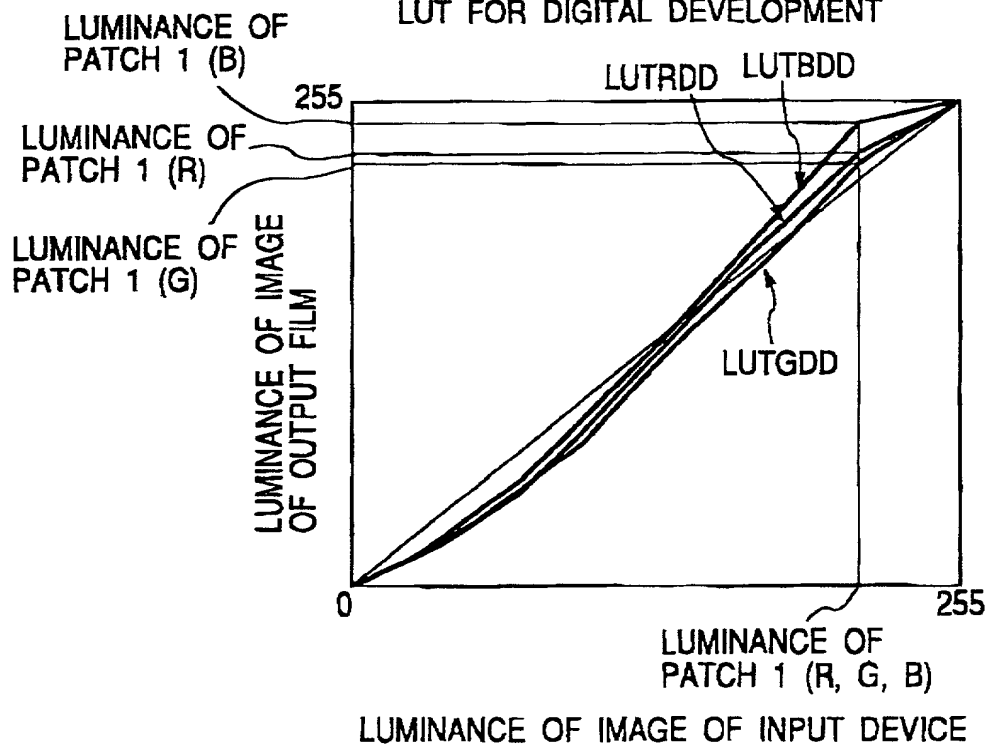


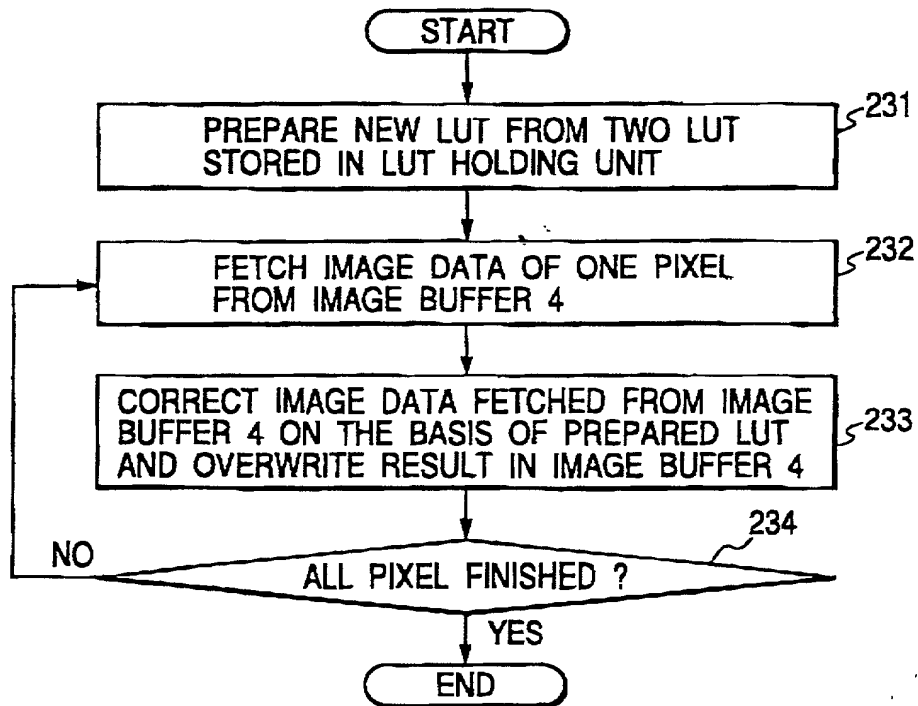
FIG. 180937844.05399
669250 44827E60

FIG. 19

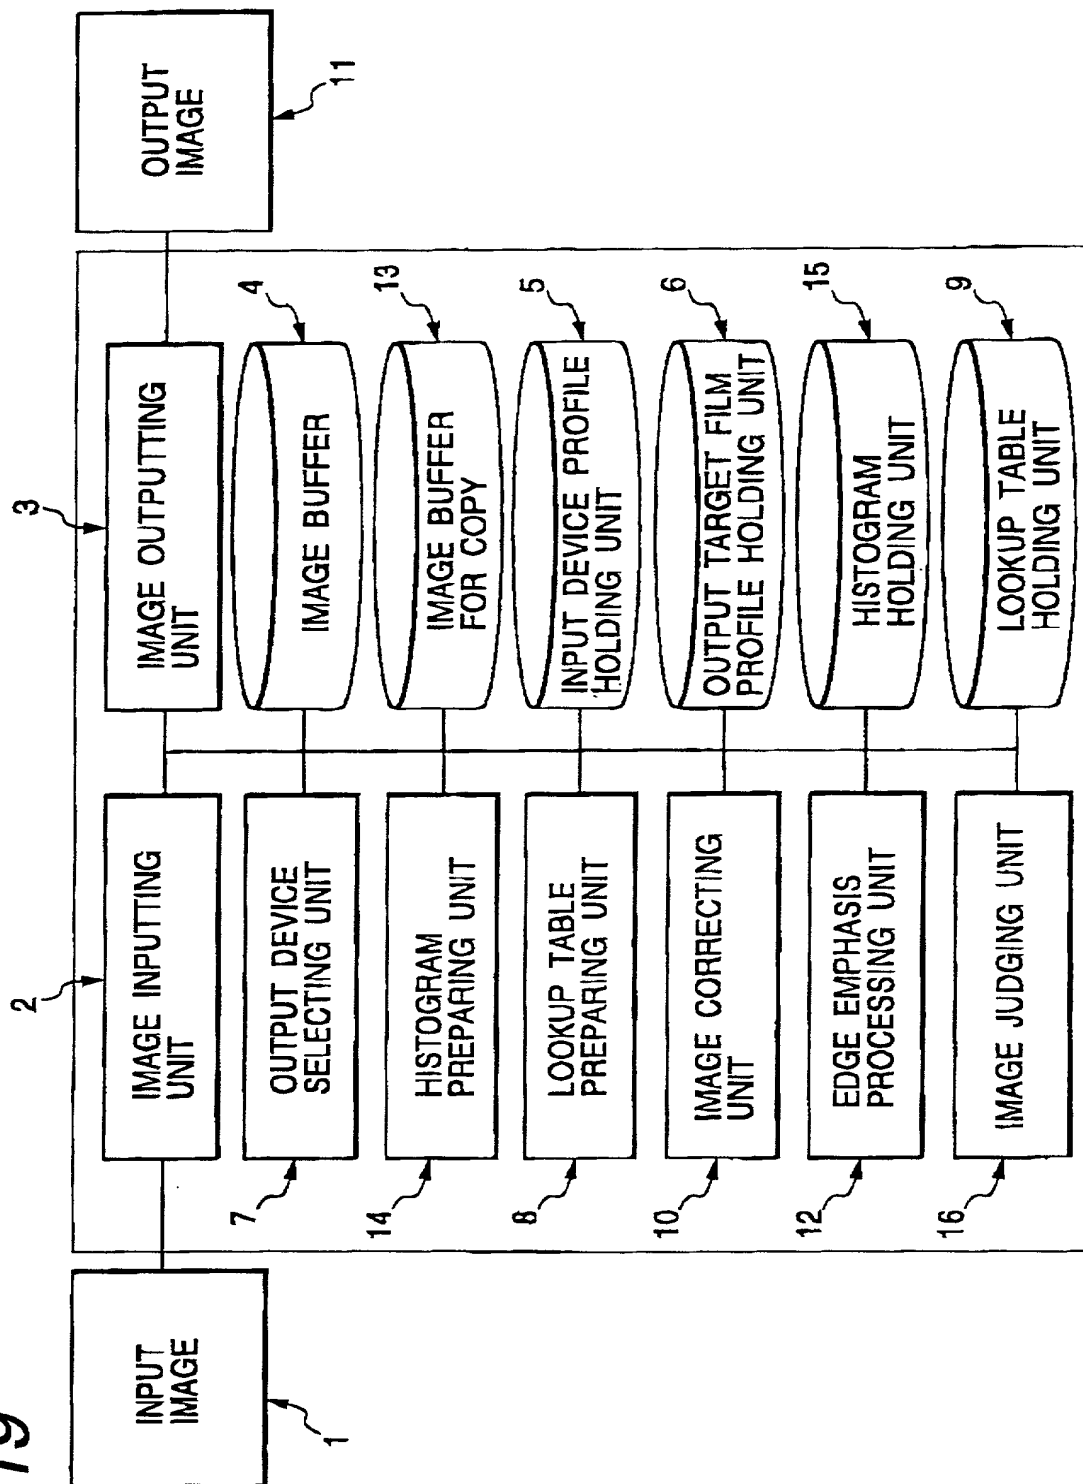


FIG. 20

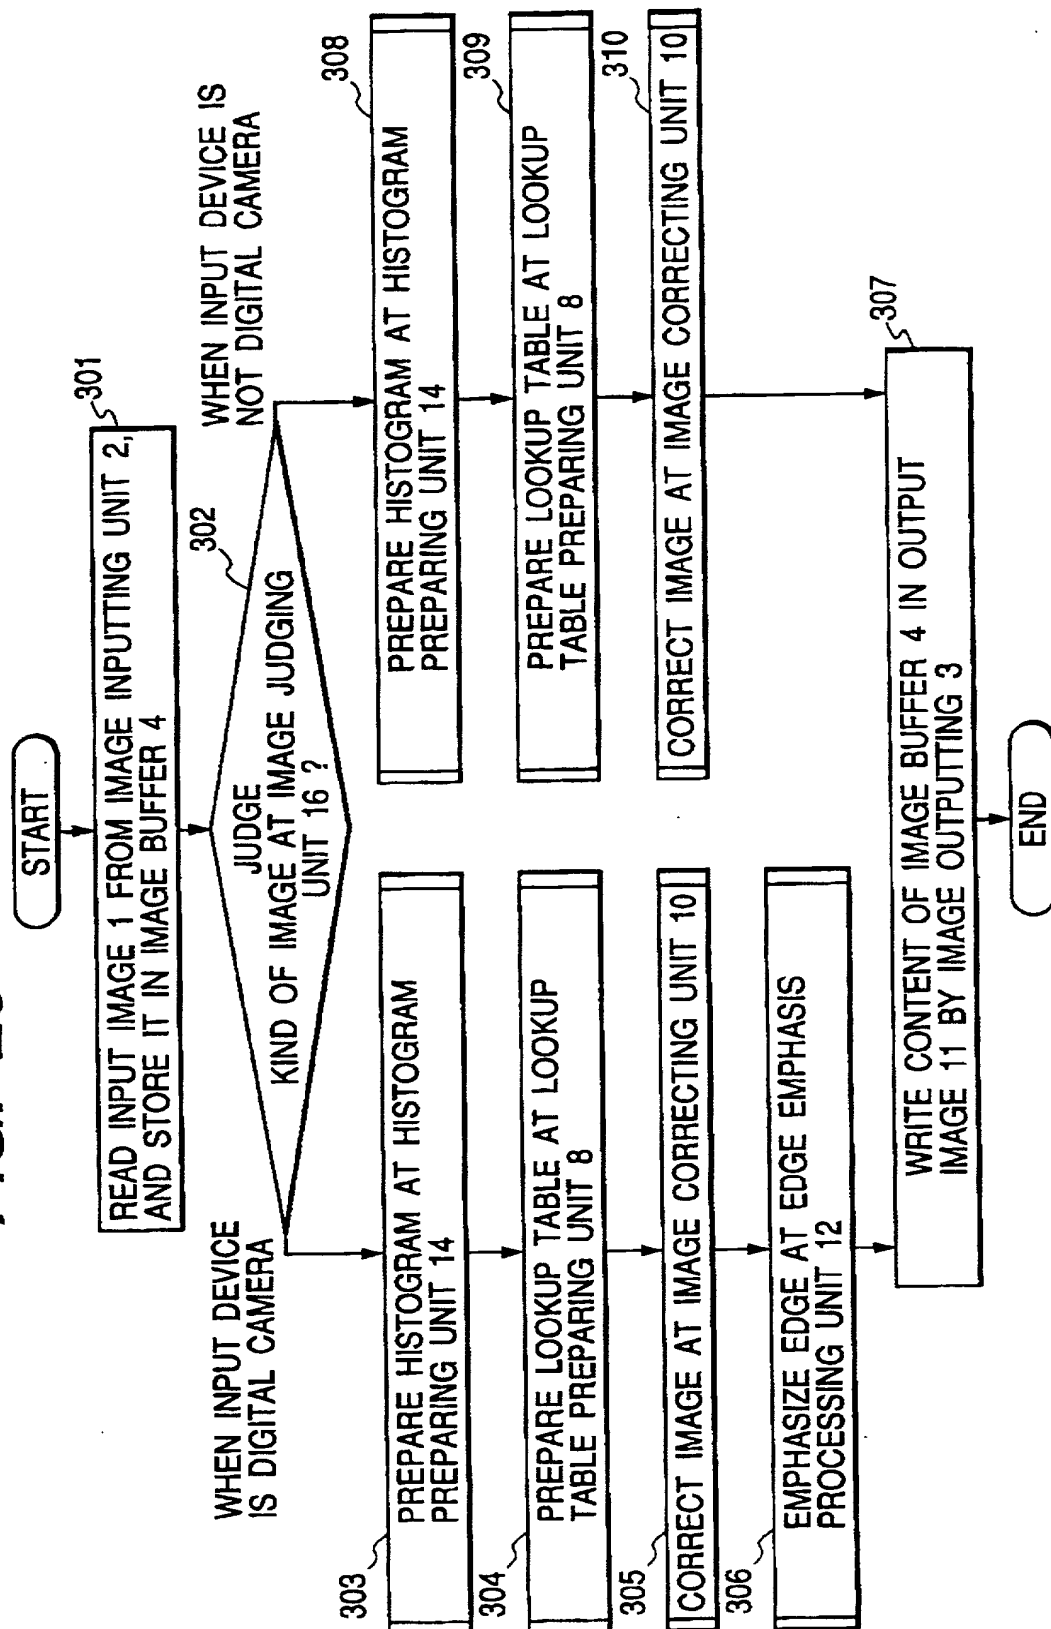


FIG. 21

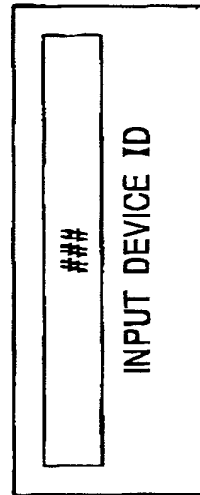


IMAGE HEADER

PIXEL	R VALUE	G VALUE	B VALUE
IMG[0]	##	##	##
IMG[1]	##	##	##
IMG[2]	##	##	##
IMG[3]	##	##	##
IMG[4]	##	##	##
IMG[5]	##	##	##
IMG[6]	##	##	##
IMG[7]	##	##	##
:			
IMG[n]	##	##	##
:			

IMAGE DATA

FIG. 22

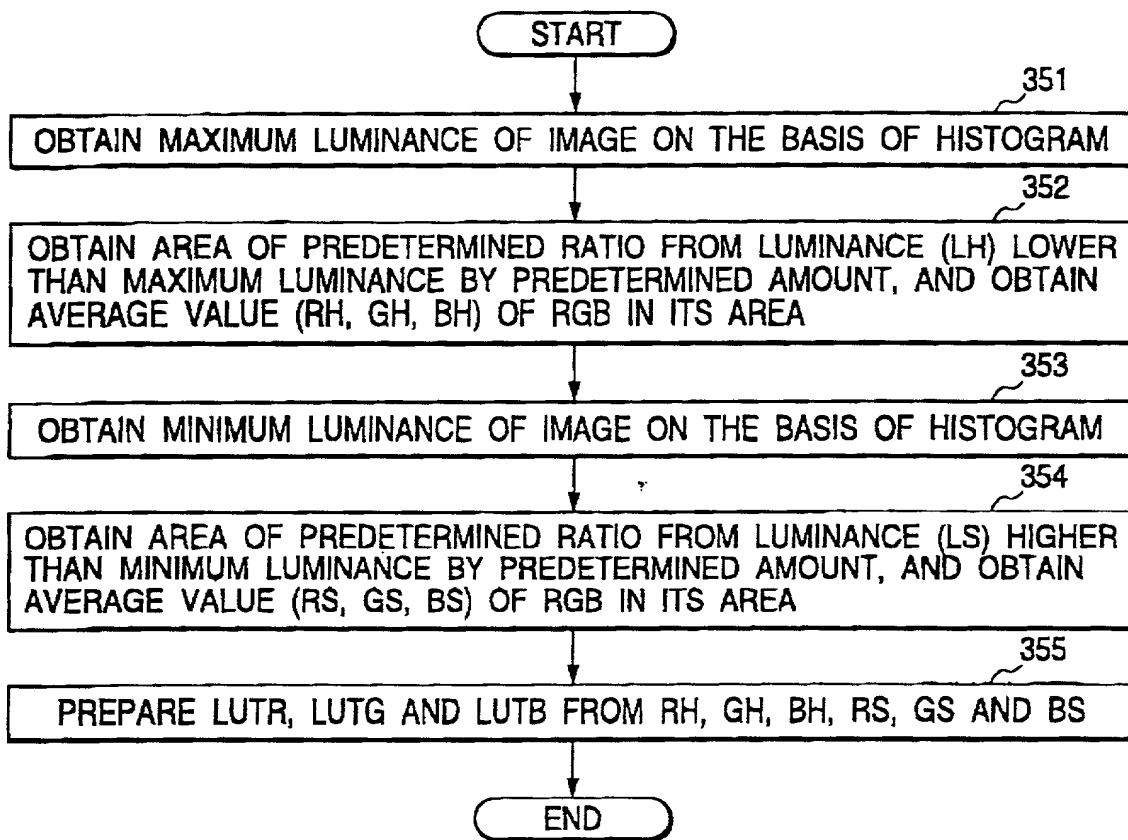
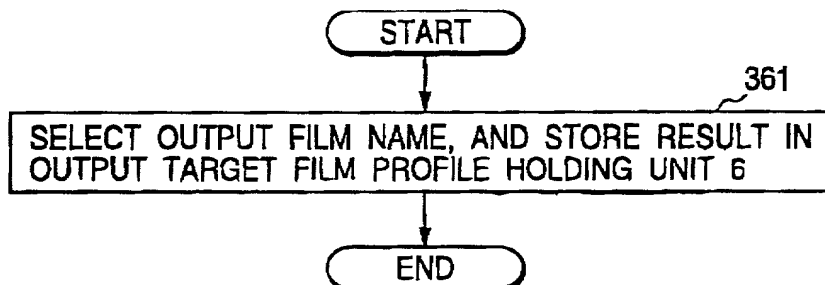


FIG. 23



**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled IMAGE PROCESSING METHOD AND APPARATUS AND RECORDING MEDIUM

the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
Japan	10-144254	26/May/1998	Yes
Japan	11-138543	19/May/1999	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	--

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor TAKAHIRO MATSUURA

Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 35-12, Konandai 1-chome, Konan-ku, Yokohama-shi,
Kanagawa-ken, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko
3-chome, Ohta-ku, Tokyo, Japan

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 2)

Full Name of Second Joint Inventor, if any TAKESHI MAKITA

Second Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 7-1-336, Minami Ikuta 7-chome, Tama-ku, Kawasaki-shi,
Kanagawa-ken, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko
3-chome, Ohta-ku, Tokyo, Japan

Full Name of Third Joint Inventor, if any OSAMU YAMADA

Third Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 5-20, Higashi Magome 2-chome, Ohta-ku, Tokyo, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko
3-chome, Ohta-ku, Tokyo, Japan

F501\W182982\RPB\lmj

09317844.05369
669250.44827360